

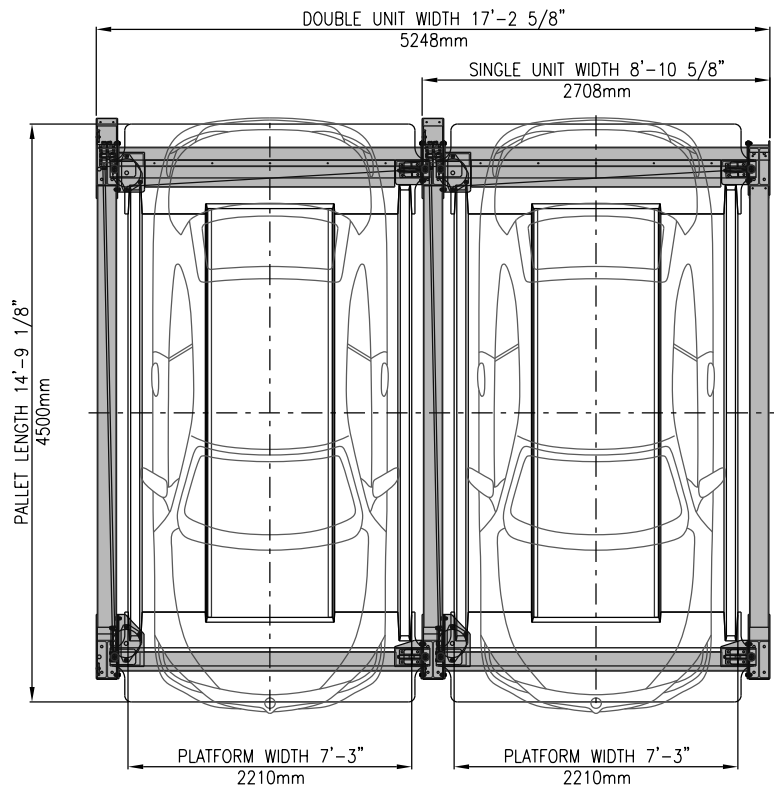



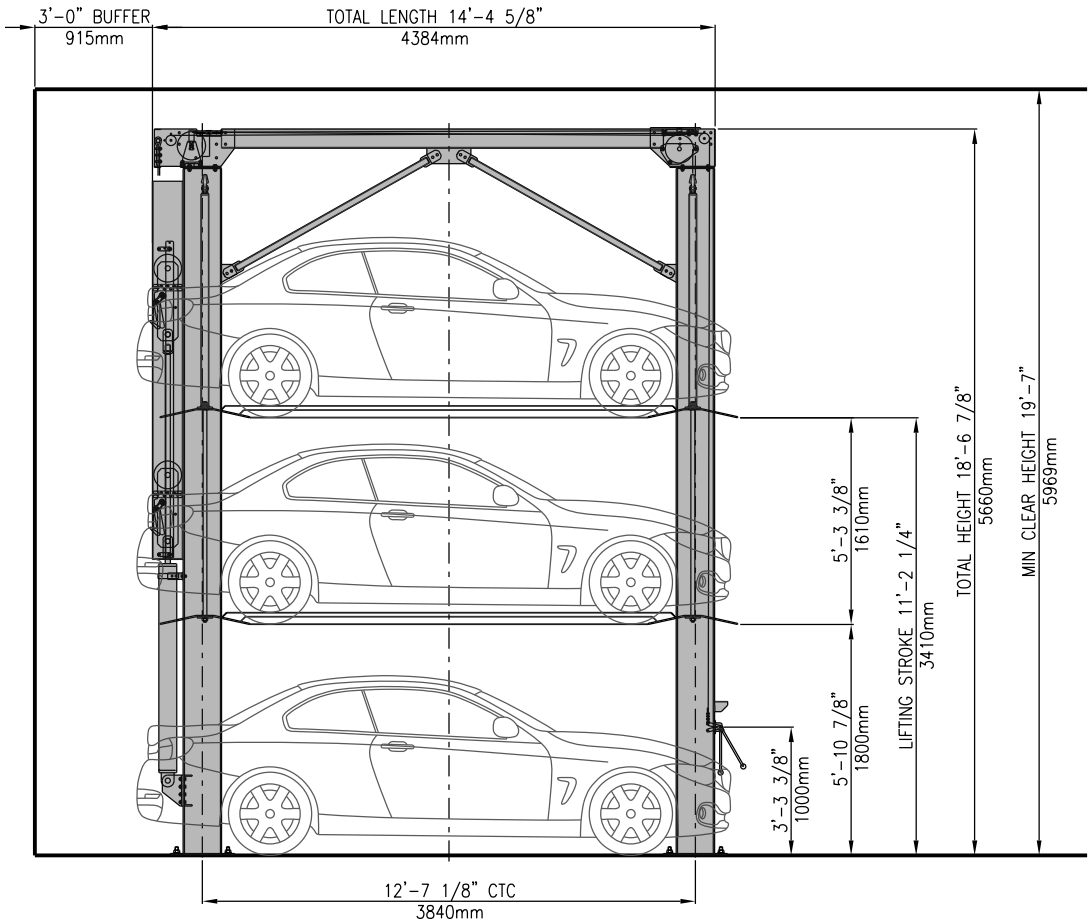


SPECIFICATIONS			
MODEL NO.		VSS-PH3-L	
SYSTEM TYPE		TRIPLE STACKER	
PARKING CAPACITY		3 CARS	
AVAILABLE CAR	WHEELBASE	10'-2"	(3,100 mm)
	TRACK*	5'-7"	(1,700 mm)
	HEIGHT	5'-3"	(1,600 mm)
	WEIGHT	5512 lbs	(2,500 kg)
CYLINDER		PISTON Ø120, ROD Ø40, 2070st	
LIFTING SPEED		18'-0 1/2"/min (5.5 m/min)	
WORKING PRESSURE		1707 psi (120 kg/cm²)	
POWER REQS		AC220V/380V/460V, 3PH, 50Hz	

* TRACK DIMENSION ASSUMES 9 1/4" (235mm) TIRE WIDTH

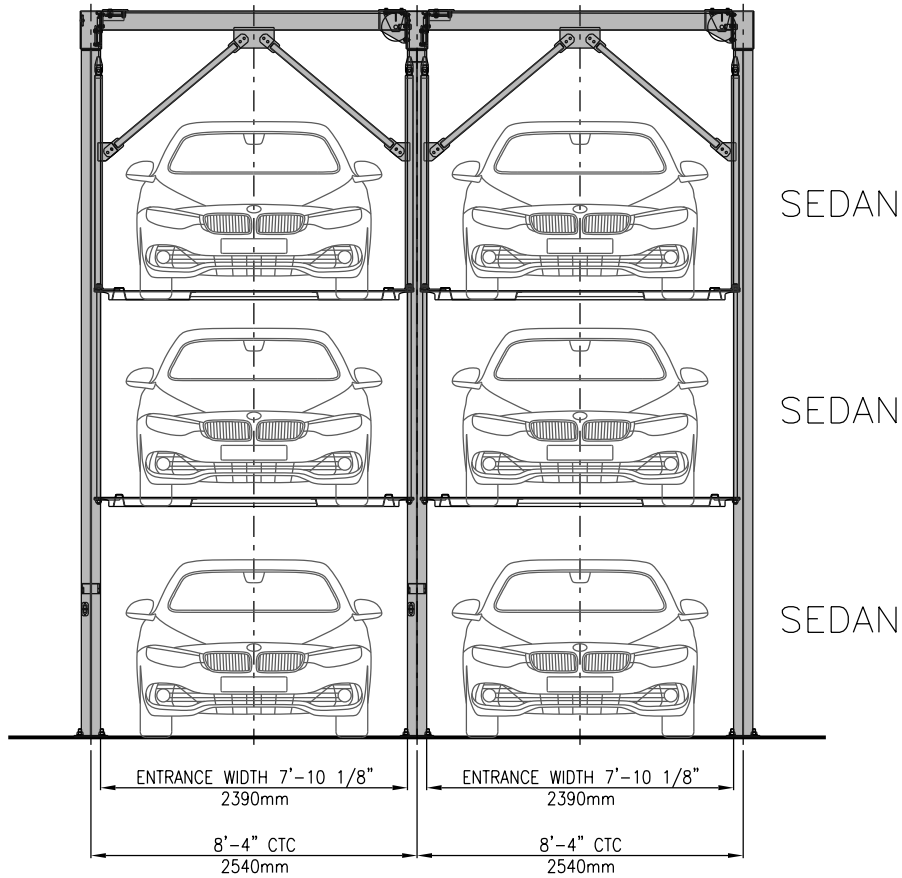


△					PROJECT							
△					PART NAME		VSS-PH3-L TRIPLE STACKER (ALL SEDAN)					
REV	DETAIL OF REVISION	DATE	DESIGNED	APPROVED	PROJECTION	SCALE	DATE	DESIGNED	CHECKED	APPROVED		
THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF PARKMATIC AND SHALL NOT BE GIVEN, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT. NEW YORK OFFICE, USA 1129 Northern Blvd Suite #400 Manhasset, NY 11030 E: info@parkmatic.com P: +1-800-422-5438 W: parkmatic.com					⬠	⊕		SR	MW			
					DWG. NO						REVISION	△
					P arkmatic PARKMATIC AUTOMATED & MECHANICAL PARKING SYSTEMS							

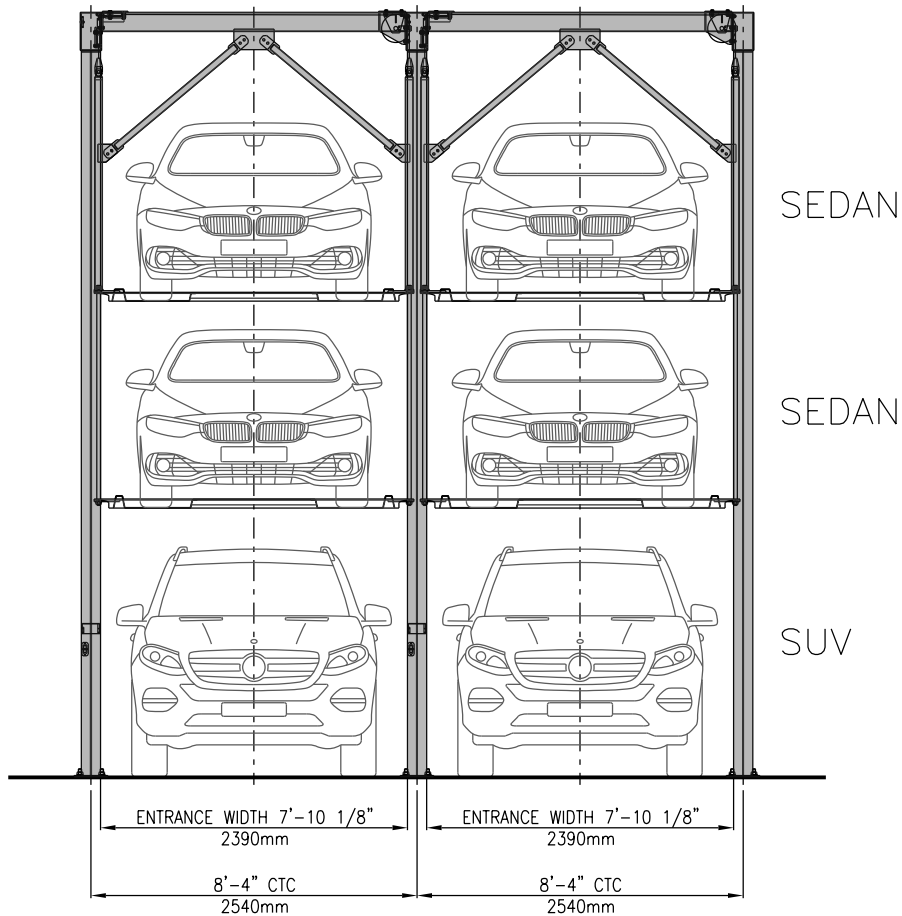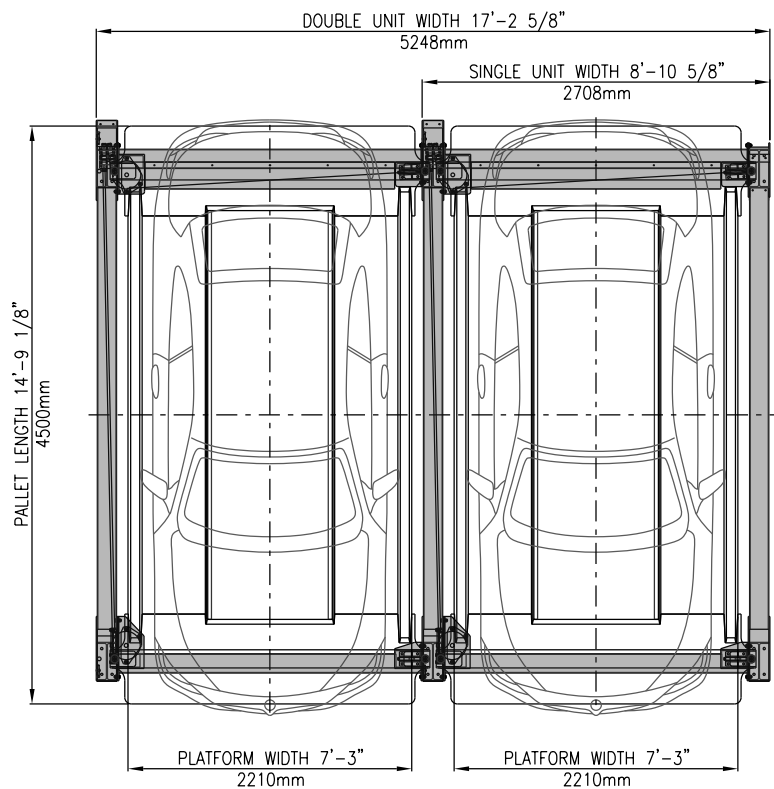

SPECIFICATIONS			
MODEL NO.		VSS-PH3-SL	
SYSTEM TYPE		TRIPLE STACKER	
PARKING CAPACITY		3 CARS	
AVAILABLE CAR	WHEELBASE	10'-2"	(3,100 mm)
	TRACK*	5'-7"	(1,700 mm)
	HEIGHT	5'-3" (1,600 mm) / 6'-6 3/4" (2,000 mm)	
	WEIGHT	5512 lbs (2,500 kg)	
CYLINDER		PISTON Ø120, ROD Ø40, 2070st	
LIFTING SPEED		18'-0 1/2"/min (5.5 m/min)	
WORKING PRESSURE		1707 psi (120 kg/cm²)	
POWER REQ'S		AC220V/380V/460V, 3PH, 50Hz	

* TRACK DIMENSION ASSUMES 9 1/4" (235mm) TIRE WIDTH

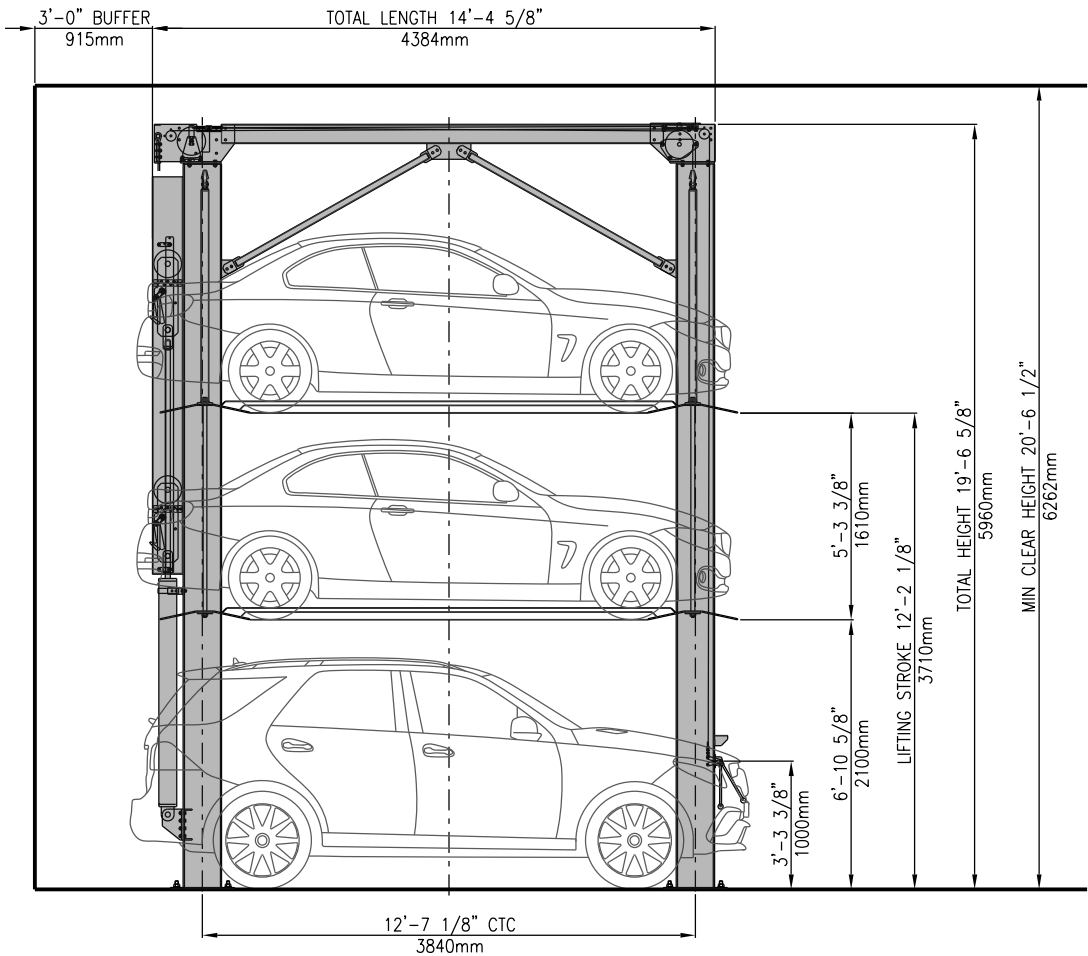



2					PROJECT					
1					PART NAME	VSS-PH3-SL TRIPLE STACKER (1 SUV & 2 SEDAN)				
REV	DETAIL OF REVISION	DATE	DESIGNED	APPROVED	PROJECTION	SCALE	DATE	DESIGNED	CHECKED	APPROVED
								SR	MW	
				DWG. NO				REVISION	△	

THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF PARKMATIC AND SHALL NOT BE GIVEN, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT.

NEW YORK OFFICE, USA
1129 Northern Blvd
Suite #400
Manhasset, NY 11030
E: info@parkmatic.com
P: +1-800-422-5438
W: parkmatic.com




PARKMATIC AUTOMATED & MECHANICAL PARKING SYSTEMS

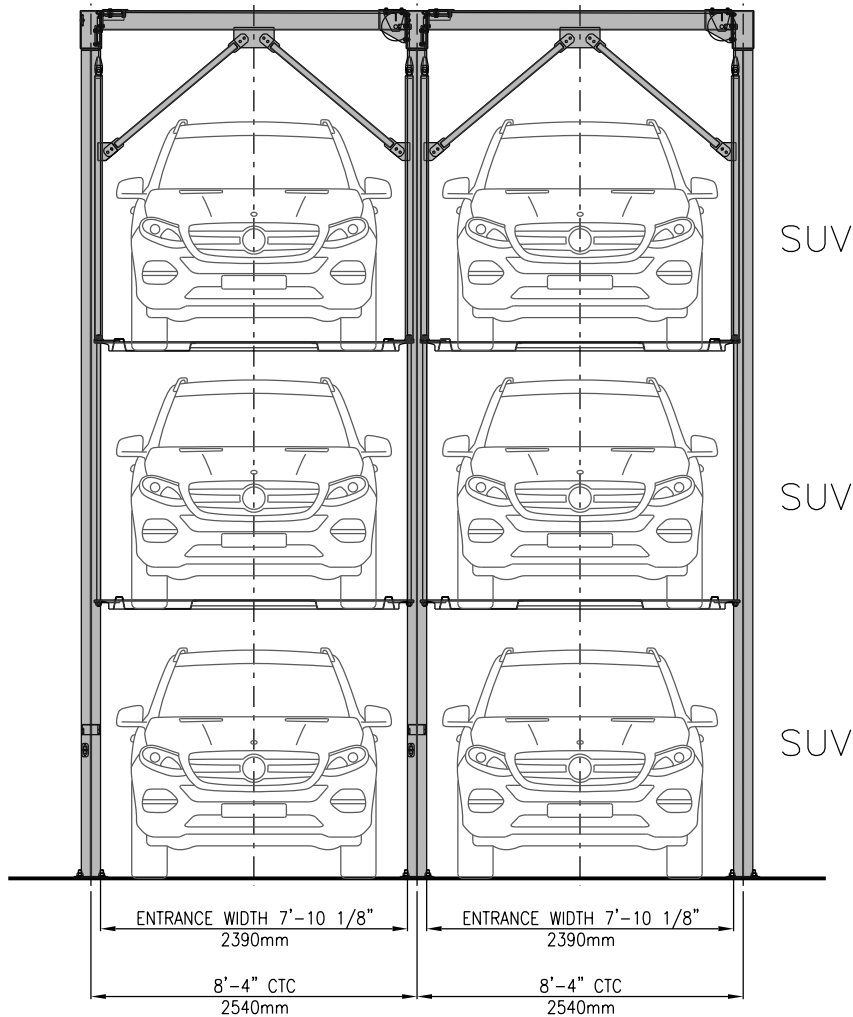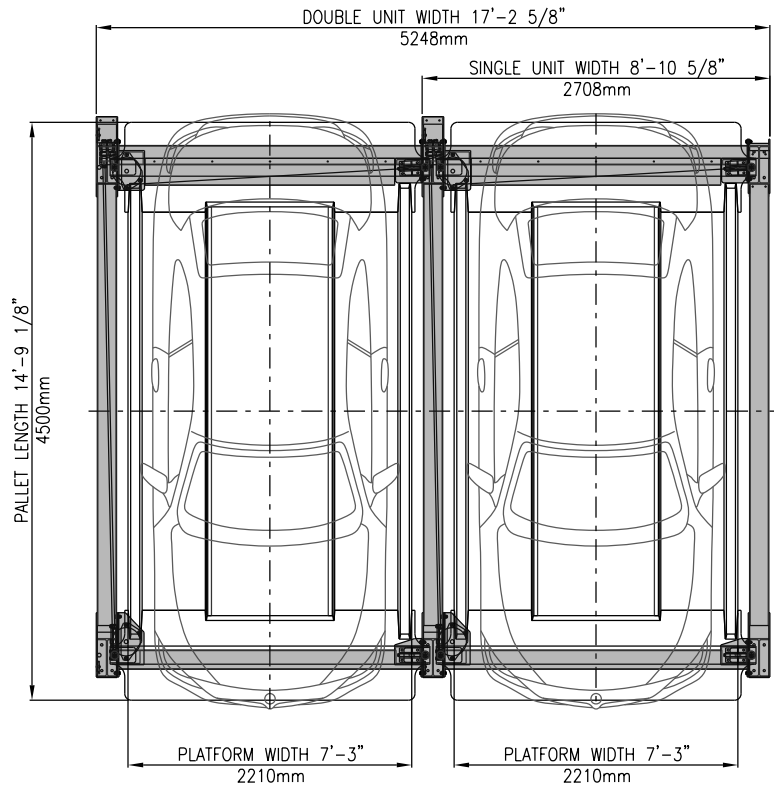

SPECIFICATIONS			
MODEL NO.		VSS-PH3-S	
SYSTEM TYPE		TRIPLE STACKER	
PARKING CAPACITY		3 CARS	
AVAILABLE CAR	WHEELBASE	10'-2"	(3,100 mm)
	TRACK*	5'-7"	(1,700 mm)
	HEIGHT	6'-6 3/4"	(2,000 mm)
	WEIGHT	5512 lbs	(2,500 kg)
CYLINDER		PISTON Ø120, ROD Ø40, 2070st	
LIFTING SPEED		18'-0 1/2"/min (5.5 m/min)	
WORKING PRESSURE		1707 psi (120 kg/cm²)	
POWER REQ		AC220V/380V/460V, 3PH, 50Hz	

* TRACK DIMENSION ASSUMES 9 1/4" (235mm) TIRE WIDTH

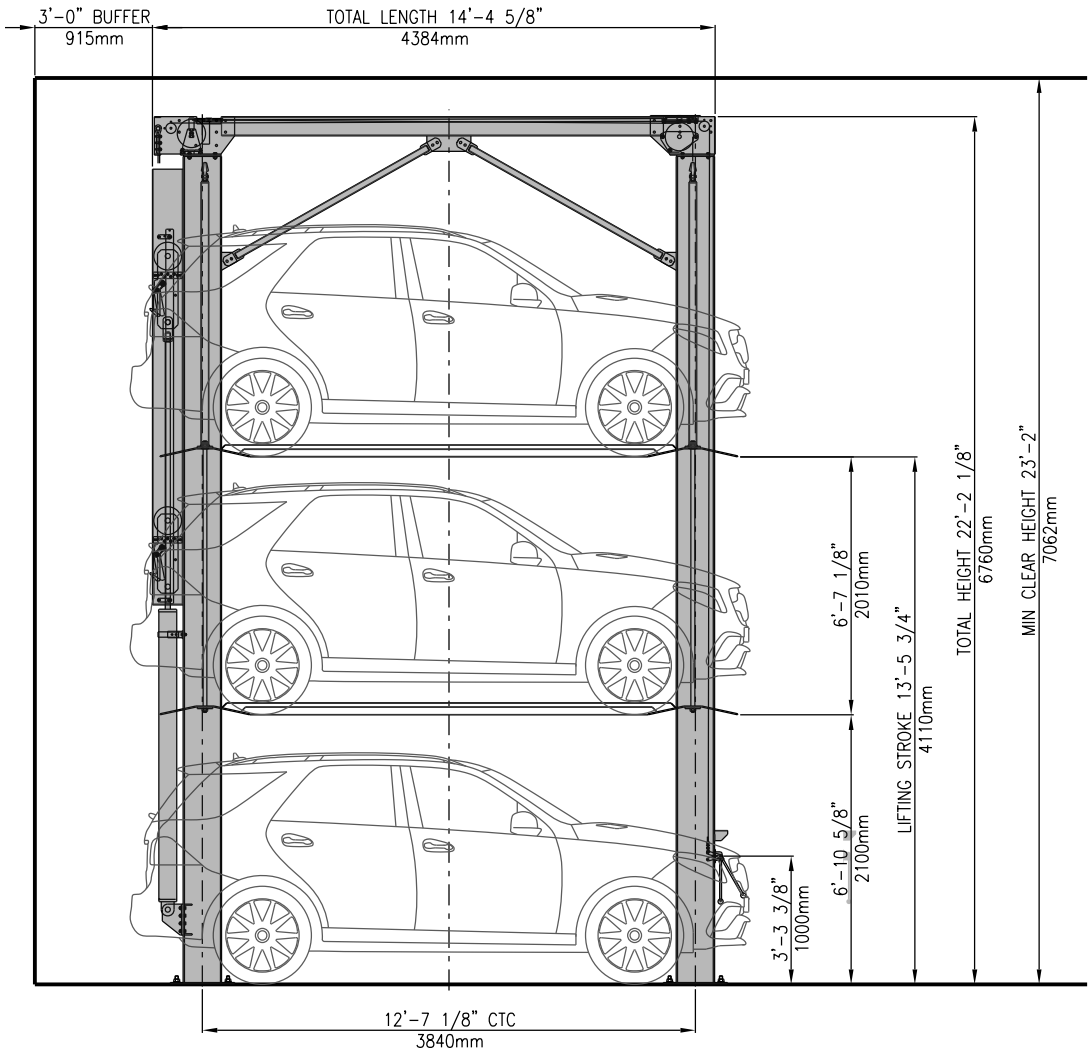

2					PROJECT					
1					PART NAME	VSS-PH3-S TRIPLE STACKER (ALL SUV)				
REV	DETAIL OF REVISION	DATE	DESIGNED	APPROVED	PROJECTION	SCALE	DATE	DESIGNED	CHECKED	APPROVED
								SR	MW	
		DWG. NO			REVISION					

THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF PARKMATIC AND SHALL NOT BE GIVEN, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT.

NEW YORK OFFICE, USA
1129 Northern Blvd
Suite #400
Manhasset, NY 11030
E: info@parkmatic.com
P: +1-800-422-5438
W: parkmatic.com



PARKMATIC AUTOMATED & MECHANICAL PARKING SYSTEMS